


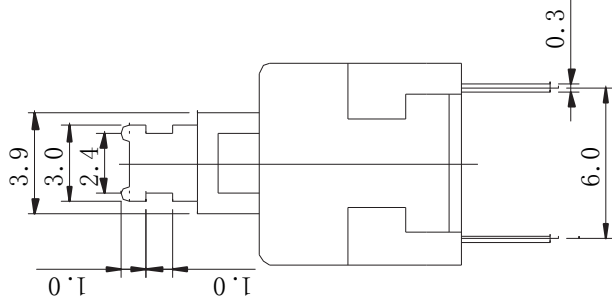
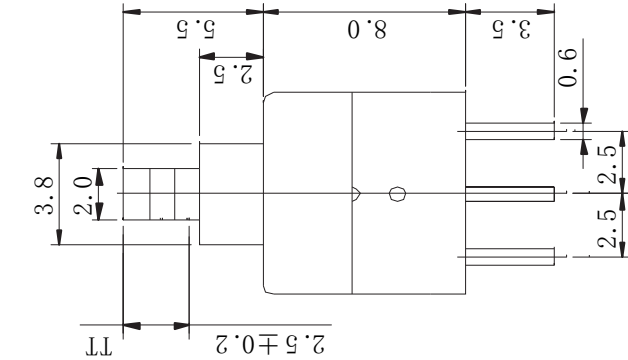



SCHEMATIC



P. C. B LAYOUT



Rated Voltage	DC30V 0.1A
Withstand Voltage	AC250V 1 minute
Contact Resistance	≤ 50 mΩ
Operating Force	160 ± 80gf
Insulation Resistance	≥ 100 MΩ DC250V
Soldering Process	Hand Soldering
Mechanical Life	100,000 cycles
Electrical Life	10,000 cycles
Soldering Temper	Hand soldering Wave soldering
Total Travel (TT)	2.5 ± 0.2 mm
Operating Temper	-25 °C ~ + 65 °C
Ambient Humidity Used	< 85%RH

REVISION	DESCRIPTION	REVISED BY	TOLEANCES .X ± .XX ±	ANGLE 1/2°	SCALE	UNIT	PART NAME	BS800 SPEC DRAWING	DWG NO
A					蔡劍				
A			Alice						
A			CHECKED BY	APPROVED BY	DATE	2010.06.21	PART NO	BS800N	WS1314A
A	2010.06.21 換新圖框, 重新出圖	吳美玉							