


ROTARY SWITCH

Model

Outline Drawing

SR2511F-□□-LF0A-C9-S

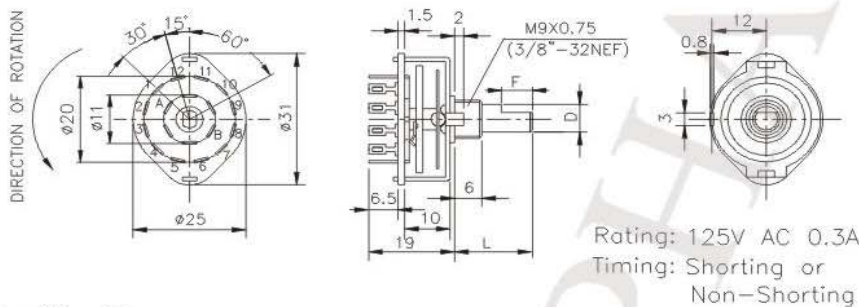


Rating: 125V AC 0.3A
Timing: Shorting or Non-Shorting

L=10~45mm
D=φ6mm

CHANGEOVER ANGLE=30°

ORDER NO.	SW. FUNCTION	ORDER NO.	SW. FUNCTION
SR2511F-0102	SP 2 POS.	SR2511F-0202	DP 2 POS.
SR2511F-0103	SP 3 POS.	SR2511F-0203	DP 3 POS.
SR2511F-0104	SP 4 POS.	SR2511F-0204	DP 4 POS.
SR2511F-0105	SP 5 POS.	SR2511F-0205	DP 5 POS.
SR2511F-0106	SP 6 POS.	SR2511F-0206	DP 6 POS.
SR2511F-0107	SP 7 POS.	SR2511F-0302	3P 2 POS.
SR2511F-0108	SP 8 POS.	SR2511F-0303	3P 3 POS.
SR2511F-0109	SP 9 POS.	SR2511F-0304	3P 4 POS.
SR2511F-0110	SP 10 POS.	SR2511F-0402	4P 2 POS.
SR2511F-0111	SP 11 POS.	SR2511F-0403	4P 3 POS.
SR2511F-0112	SP 12 POS.	SR2511F-0602	6P 2 POS.


SR2512F-□□-LK0A-C9-S

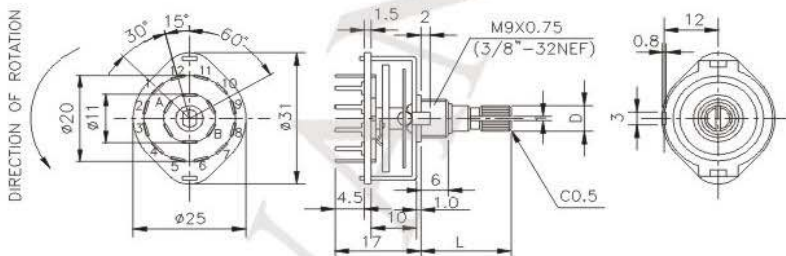

Rating: 125V AC 0.3A
Timing: Shorting or Non-Shorting
SR2512 SW. FUNCTION similar to SR2511

L=10~45mm
D=φ6mm
CHANGEOVER ANGLE=30°

SR2513F-□□-LK0A-T-S

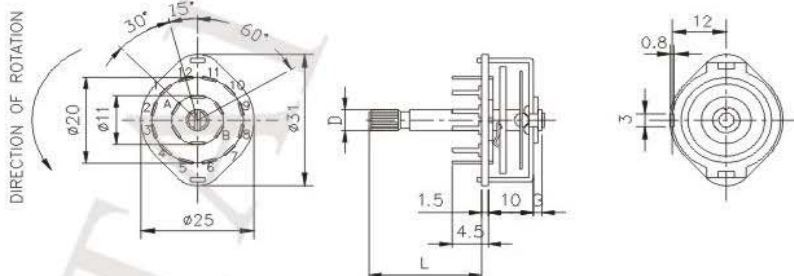

Rating: 125V AC 0.3A
Timing: Shorting or Non-Shorting
SR2513 SW. FUNCTION similar to SR2511

L=10~40mm
D=φ6mm
CHANGEOVER ANGLE=30°